



Double Fender Attachment Kit Installation

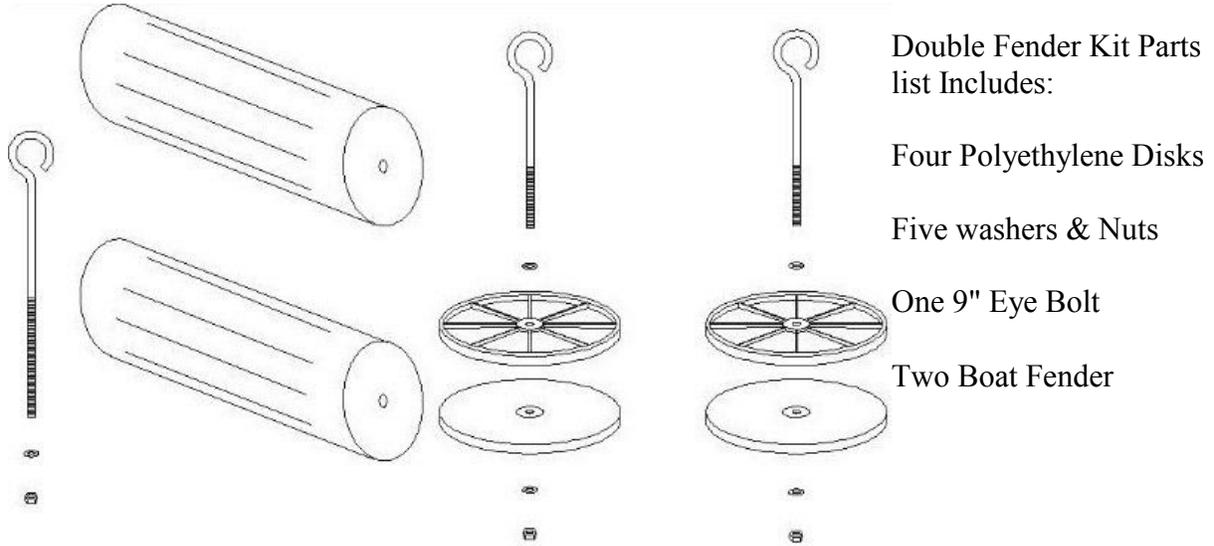

Place top disk over recess hole and run eye bolt through top disk hole through bottom disk hole. then use washers and lock nuts to tighten eye bolt & disk assembly.

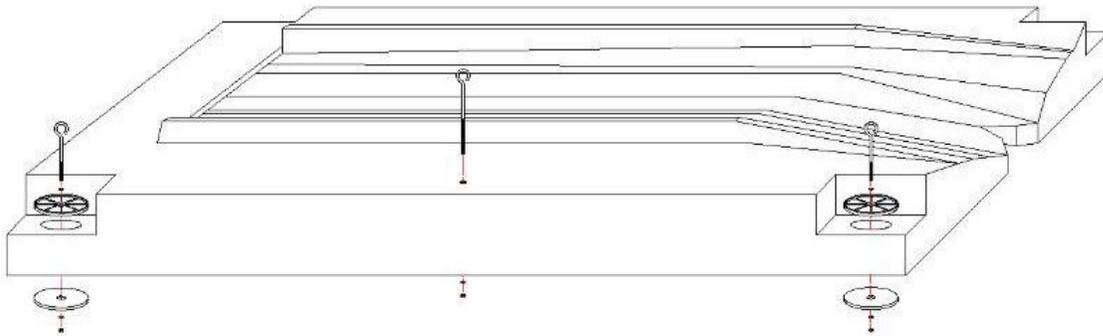

Install boat fender to floating dock and tighten rope from disks to eye screw on the floating dock. Frequent rope replacement may be needed from seasonal usage.

